

ENAARGYINDIA



LIMITED PRODUCT*

WHENEVER YOU THINK FOR LIGHTING
THINK ENAARGY



ENAARGY

ENAARGY IN EVERY GLOW

ENAARGY ADVANTAGE



Quality You Can Trust

Our promise is simple – unmatched quality, lasting performance, and the trust of thousands.



Innovative Technology

Where Modern Innovation Meets Trusted Technology.



Sustainable Manufacturing

We combine modern technology with eco-friendly practices to ensure that every product we make contributes to a cleaner and greener tomorrow.

ABOUT US

ENAARGY is a leading manufacturer of premium lighting solutions for residential, commercial, and industrial spaces. With a strong focus on innovation, quality, and energy efficiency, we've been illuminating lives and spaces for over a decade.

We combine smart engineering with sustainable technology to deliver products that exceed industry standards in both form and function.

WE HELP BRANDS TO CONNECT

Whether you're designing homes, offices, showrooms or outdoor landscapes — ENAARGY empowers your vision with light that speaks.



End-to-End Solutions

Whether you're designing homes, offices, showrooms or outdoor landscapes — ENAARGY empowers your vision with light that speaks.



Reliable Support

From design to delivery, we support you with complete lighting solutions tailored to your needs.



Partner-First Approach

We believe in building long-term relationships by offering consistent quality, timely delivery, and fair pricing.



enaargyindia@gmail.com



www.enaargy.com

LIGHTING THE FUTURE WITH EXCELLENCE

EN AARGY delivers unmatched quality, innovation,
and trust in every light we create.

INDEX

CONSUMER LIGHTING

CEILING LIGHTS

GLOW	01
MINI HERON	02
NEXA SHINE	03
LUME	04
GLOWIN	05
PRECISION GLOW	06-07
GLOWEDGE	08-09
SKY LIGHT	10-12
BRIGHT BEAM	13
NEIGLOW	14-15
CYLINTECH	16-18
TRACKRAY	19
ALUX	20
PREMIUM COM	21-24
GLAM COB	25-27
LUMA GLOW	28-29
GLOW STONE	30
TIRANGA	31
SPARKLINE 320	32
PROFILE STRIP LIGHT	33
DRIVER	34
STEP LIGHT	35

OUTDOOR LIGHTS

TEJAS	37
POWERBEAM	38
SPIKE LIGHT	39
K - LIGHT	40
HALF - K - LIGHT	41
WAVE	42
LEXUS	43-44
GLOW SPHERE	45
GLOVA	51
REFLEX	52
GLORA	53



CEILING LIGHTS

Ultra-Modern Lighting with a Decorative Edge

Experience the perfect blend of style and performance with ENAARGY's contemporary range. Featuring smart edge-lit panels, high-precision COB spotlights, and both recess-mounted and surface fixtures in timeless round and square designs, our collection is ideal for today's modern spaces. Thoughtfully crafted finishes and innovative engineering ensure flawless illumination—even in spaces with low ceiling heights.



GLOW

2W SPOT LIGHT


2 Years Warranty

Ultra-Bright, Sleek LED Spotlight

ENARGY's 2W recess-mounted LED spotlight combines a refined design with powerful performance. Built with a durable polycarbonate housing and equipped with high-brightness LED chips, it delivers glare-free illumination—perfect for low-ceiling spaces that demand both efficiency and style.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	CUT OUT SIZE
2.5KV	≥80	80 LM/W*	220-240V AC, 50HZ	>0.90	32mm

COLOUR

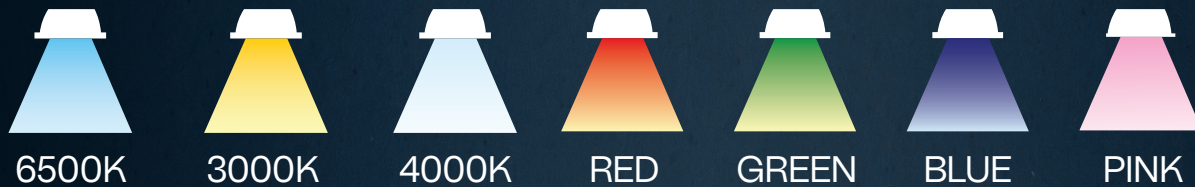

6500K	3000K	4000K	Red	Green	Blue	Pink
EN0061	EN0062	EN0063	EN0064	EN0065	EN0066	EN0067

APPLICATIONS



2w



MINI HERON








3W DEEP LIGHT

2 Years Warranty

A sleek recessed LED that gives soft, glare-free light. Perfect for accent lighting or cozy ambience, built to last with a clean, modern finish.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	CUT OUT SIZE
2.5KV	≥80	50 LM/W*	220~240V AC, 50HZ	>0.90	58mm

COLOUR

						
6500K	3000K	4000K	RED	GREEN	BLUE	PINK
6500K	3000K	4000K	Red	Green	Blue	Pink
EN0071	EN0072	EN0073	EN0074	EN0075	EN0076	EN0077

APPLICATIONS



3w



HIGH CRI



20K HOURS



HIGH BRIGHTNESS

NEXA SHINE

NEXA COB LIGHT

2 Years Warranty

Innova Neo Swivel Spotlight

Lens-based accent light with a clean, modern design. Delivers crisp, focused illumination where you need it.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
2.5KV	≥80	60 LM/W*	220~240V AC, 50HZ	>0.5	120°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	3000k	4000k
3w	40mm	56mm	75mm	EN0031	EN0032	EN0033
6w	46mm	72mm	95mm	EN0041	EN0042	EN0043
9w	56mm	89mm	116mm	EN0051	EN0052	EN0053
12w	56mm	115mm	139mm	EN0054	EN0055	EN0056

APPLICATIONS



LIGHTING

LUME

LED CONCEALED LIGHT

2 Years Warranty

A sleek recessed LED that gives soft, glare-free light. Perfect for accent lighting or cozy ambience, built to last with a clean, modern finish.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	PRODUCT SIZE
2.5KV	≥80	80 LM/W*	220~240V AC, 50HZ	>0.90	110mm

COLOUR



6500K



4000K



3000K



RED



GREEN




BLUE



PINK

6500K	4000K	3000K	Red	Green	Blue	Pink
EN0001	EN0002	EN0003	EN0004	EN0005	EN0006	EN0007

APPLICATIONS

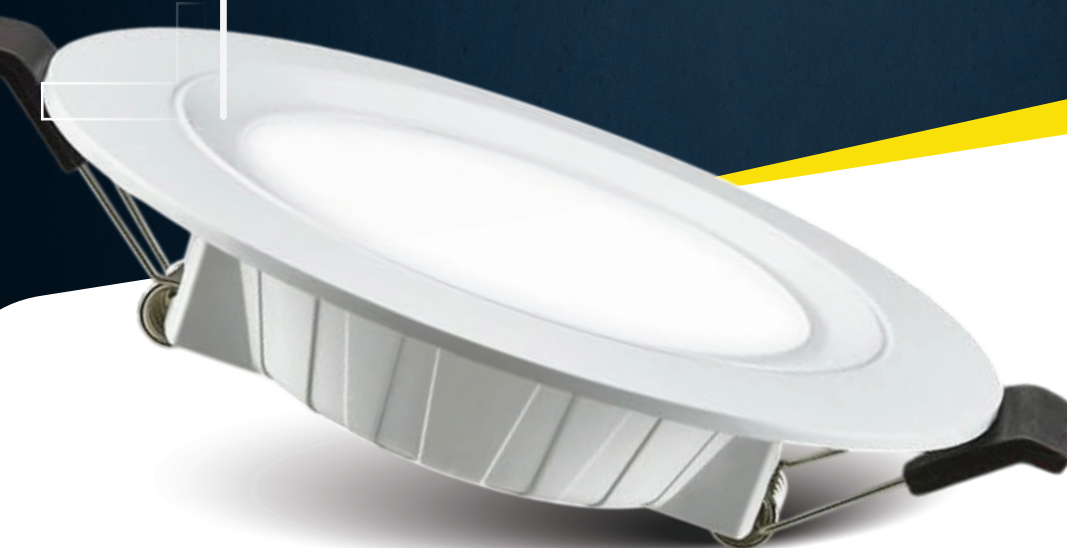**6_w**

GLOWIN

LED CONCEALED LIGHT

2 Years Warranty

Innova Neo Swivel Spotlight

Modern, premium, and space-saving. Features a high-quality diffuser for soft, comfortable lighting.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	PRODUCT SIZE
2.5KV	≥80	80 LM/W*	220~240V AC, 50HZ	>0.90	110mm

COLOUR



3000K



4000K



6500K

Wattage	6500k	4000k	3000k
9w	EN0011	EN0012	EN0013
12w	EN0021	EN0022	EN0023

APPLICATIONS



HIGH BRIGHTNESS



PRECISION GLOW

SQUARE PC BACKLIT PANEL

2 Years Warranty

Sleek round panel with uniform backlit glow. Made from high-quality polycarbonate for bright, even, and long-lasting illumination.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	90 LM/W*	220~240V AC, 50HZ	>0.95	120°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	3000k	4000k
6w	27mm	77x77mm	95x95mm	EN0504	EN0505	EN0506
12w	27mm	102x102mm	129x129mm	EN0514	EN0515	EN0516
15w	27mm	120x120mm	142x142mm	EN0524	EN0525	EN0526
18w	27mm	145x145mm	173x142mm	EN0534	EN0535	EN0536

APPLICATIONS



PRECISION GLOW

ROUND PC BACKLIT PANEL

2 Years Warranty

Sleek round panel with uniform backlit glow. Made from high-quality polycarbonate for bright, even, and long-lasting illumination.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	90 LM/W*	220~240V AC, 50HZ	>0.95	120°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	3000k	4000k
6w	27mm	77mm	95mm	EN0501	EN0502	EN0503
12w	27mm	102mm	129mm	EN0511	EN0512	EN0513
15w	27mm	120mm	142mm	EN0521	EN0522	EN0523
18w	27mm	145mm	173mm	EN0531	EN0532	EN0533

APPLICATIONS



HIGH BRIGHTNESS



LIGHTING

GLOWEDGE

SQUARE RDL PANEL LIGHT

Slim, stylish, and reliable. Features a rimless design that spreads bright, even light with superior efficiency and modern appeal.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	120°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	3000k	4000k
8w	36mm	100x100mm	115x115mm	EN0254	EN0255	EN0256
12w	36mm	125x125mm	140x140mm	EN0264	EN0265	EN0266
15w	36mm	150x150mm	166x166mm	EN0274	EN0275	EN0276
20w	36mm	200x200mm	220x220mm	EN0284	EN0285	EN0286

APPLICATIONS



GLOWEDGE

ROUND RDL PANEL LIGHT

Slim, stylish, and reliable. Features a rimless design that spreads bright, even light with superior efficiency and modern appeal.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	120°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	3000k	4000k
8w	36mm	100mm	115mm	EN0251	EN0252	EN0253
12w	36mm	125mm	140mm	EN0261	EN0262	EN0263
15w	36mm	150mm	166mm	EN0271	EN0272	EN0273
20w	36mm	200mm	220mm	EN0281	EN0282	EN0283

APPLICATIONS



HIGH BRIGHTNESS



SKY LIGHT

SQUARE ALUMINIUM PANEL

I spread comfort and clarity, turning every corner into a modern glow

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	80 LM/W*	220~240V AC, 50HZ	>0.90	120°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	3000k	4000k
6w	29mm	100x100mm	120x120mm	EN0304	EN0305	EN0306
12w	29mm	150x150mm	168x168mm	EN0314	EN0315	EN0316
18w	29mm	200x200mm	218x218mm	EN0324	EN0325	EN0326

APPLICATIONS



SKY LIGHT

ROUND ALUMINIUM PANEL

I spread comfort and clarity, turning every corner into a modern glow

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	80 LM/W*	220~240V AC, 50HZ	>0.90	120°

COLOUR



Wattage	Height	Cut Out Size	Outer Diameter	6500k	3000k	4000k
6w	29mm	100mm	120mm	EN0301	EN0302	EN0303
12w	29mm	150mm	168mm	EN0311	EN0312	EN0313
18w	29mm	200mm	218mm	EN0321	EN0322	EN0323

APPLICATIONS



SKY LIGHT

ALUMINIUM PANEL

2 Years Warranty

I spread comfort and clarity, turning every corner into a modern glow

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	80 LM/W*	220-240V AC, 50HZ	>0.90	120°

COLOUR



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	Shape
24w	29mm	275x275mm	300x300mm	EN0327	SQ
24w	29mm	275mm	300mm	EN0328	RD

APPLICATIONS



BRIGHT BEAM

LED PANEL LIGHT 2X2

2 Years Warranty

A perfect blend of sleek design and powerful brightness for homes and offices.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	85 LM/W*	220~240V AC, 50HZ	>0.90	135°

COLOUR



Wattage	Height	Cut Out Size	Outer Diameter	6500k	3000k	4000k
36w	37mm	580x580mm	595x595mm	EN0401	EN0402	EN0403
48w	37mm	580x580mm	595x595mm	EN0404	EN0405	EN0406
40w	37mm	580x580mm	595x595mm	EN0407	EN0408	EN0409

APPLICATIONS



NEOGLOW

SQUARE RIMLESS SURFACE PANEL

2 Years Warranty

Rimless elegance with surface mounted design. No false ceiling needed just Bright light with modern style.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	80 LM/W*	220~240V AC, 50HZ	>0.90	120°

COLOUR



3000K



4000K



6500K

Wattage	Height	Outer Diameter	6500k	3000k	4000k
8w	28mm	90x90mm	EN0804	EN0805	EN0806
15w	28mm	120x120mm	EN0814	EN0815	EN0816
20w	28mm	155x155mm	EN0824	EN0825	EN0826

APPLICATIONS



NEOGLOW

ROUND RIMLESS SURFACE PANEL

2 Years Warranty

Rimless elegance with surface mounted design. No false ceiling needed just Bright light with modern style.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	80 LM/W*	220~240V AC, 50HZ	>0.90	120°

COLOUR



3000K



4000K



6500K

Wattage	Height	Outer Diameter	6500k	3000k	4000k
8w	28mm	90mm	EN0801	EN0802	EN0803
15w	28mm	120mm	EN0811	EN0812	EN0813
20w	28mm	155mm	EN0821	EN0822	EN0823

APPLICATIONS



LIGHTING



CYLINTECH

CYLINDER SURFACE COB

Stylish and durable. Provides glare-free brightness with easy surface installation.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	36°

COLOUR



Wattage	Height	Outer Diameter	4000k	3000k	6500k
6w	75mm	55mm	EN0721	EN0722	EN0723
12w	95mm	75mm	EN0724	EN0725	EN0726
18w	125mm	95mm	EN0727	EN0728	EN0729

APPLICATIONS



CYLINTECH

CYLINDER SURFACE COB

Stylish and durable. Provides glare-free brightness with easy surface installation.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	 ≥80	100 LM/W*	220-240V AC, 50HZ	>0.90	36°

COLOUR



3000K



4000K



6500K

Wattage	Height	Outer Diameter	4000k	3000k	6500k
6w	75mm	55mm	EN0711	EN0712	EN0713
12w	95mm	75mm	EN0714	EN0715	EN0716
18w	125mm	95mm	EN0717	EN0718	EN0719

APPLICATIONS



HIGH BRIGHTNESS



CYLINTECH

CYLINDER SURFACE COB

Stylish and durable. Provides glare-free brightness with easy surface installation.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	36°

COLOUR



3000K



4000K



6500K

Wattage	Height	Outer Diameter	4000k	3000k	6500k
6w	75mm	55mm	EN0701	EN0702	EN0703
12w	95mm	75mm	EN0704	EN0705	EN0706
18w	125mm	95mm	EN0707	EN0708	EN0709

APPLICATIONS



HIGH BRIGHTNESS

TRACKRAY

LED TRACK LIGHT

2 Years Warranty

Dynamic design, powerful light – crafted to highlight what matters most.

- *Adjustable Design with 360° Horizontal & 90° Vertical Rotation.*
- *Premium design with stylish look in Aluminium housing.*

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220-240V AC, 50HZ	>0.90	36°

COLOUR



3000K



4000K



6500K

Wattage	6500k (WB)	3000k (WB)	4000k (WB)	6500k (BB)	3000k (BB)	4000k (BB)
10w	EN1301	EN1302	EN1303	EN1304	EN1305	EN1306
20w	EN1311	EN1312	EN1313	EN1314	EN1315	EN1316
30w	EN1321	EN1322	EN1323	EN1324	EN1325	EN1326
40w	EN1331	EN1332	EN1333	EN1334	EN1335	EN1336

APPLICATIONS



HIGH BRIGHTNESS



ALUX

LED COB LIGHT

2 Years Warranty

A perfect blend of sleek design and powerful brightness for homes and offices.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
2.5KV	≥80	60 LM/W*	220~240V AC, 50HZ	>0.5	120°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	3000k	4000k
24w	-	-	-	EN0751	EN0752	EN0753
35w	90mm	125mm	150mm	EN0754	EN0755	EN0756
50w	115mm	150mm	170mm	EN0757	EN0758	EN0759

APPLICATIONS



PREMIUM COB

BLACK ALUMINIUM COB

COB light with sharp focus. Lights up the spot you want, bright and clear.
Light that make ceiling look modern, bright, and elegant.

- Antiglare optics with deep reflector design.
- Aluminium heat sink for better heat dissipation

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	36°

COLOUR



3000K



4000K




6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	4000k	3000k
7w	62mm	55mm	67mm	EN0624	EN0625	EN0626
12w	71mm	70mm	85mm	EN0636	EN0637	EN0638
18w	100mm	80mm	95mm	EN0648	EN0649	EN0650

APPLICATIONS



HIGH BRIGHTNESS

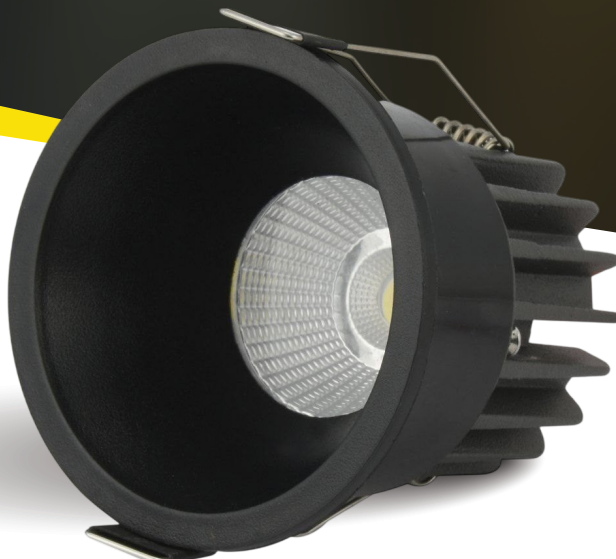

PREMIUM COB

GOLD COB

COB light with sharp focus. Lights up the spot you want, bright and clear. Light that make ceiling look modern and elegant.

- *Antiglare optics with deep reflector design.*
- *Aluminium heat sink for better heat dissipation*

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	36°

COLOUR



3000K




4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	4000k	3000k
7w	62mm	55mm	67mm	EN0630	EN0631	EN0632
12w	71mm	70mm	85mm	EN0642	EN0643	EN0644
18w	100mm	80mm	95mm	EN0654	EN0655	EN0656

APPLICATIONS

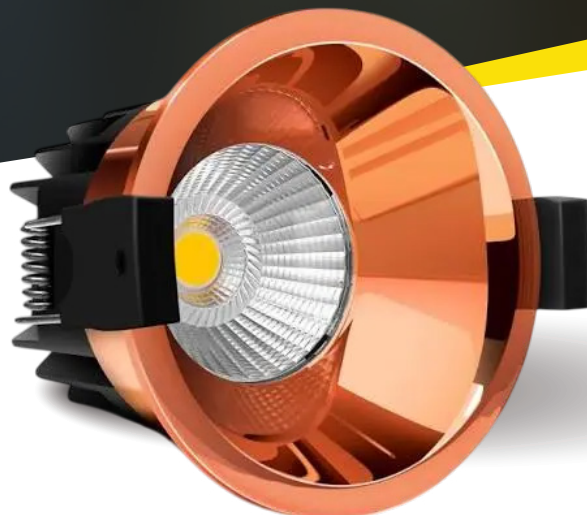

PREMIUM COB

WHITE ALUMINIUM COB

COB light with sharp focus. Lights up the spot you want, bright and clear.

Light that make ceiling look modern, bright, and elegant.

- *Antiglare optics with deep reflector design.*
- *Aluminium heat sink for better heat dissipation*

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	36°

COLOUR



3000K




4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	4000k	3000k
7w	62mm	55mm	67mm	EN0621	EN0622	EN0623
12w	71mm	70mm	85mm	EN0633	EN0634	EN0635
18w	100mm	80mm	95mm	EN0645	EN0646	EN0647

APPLICATIONS

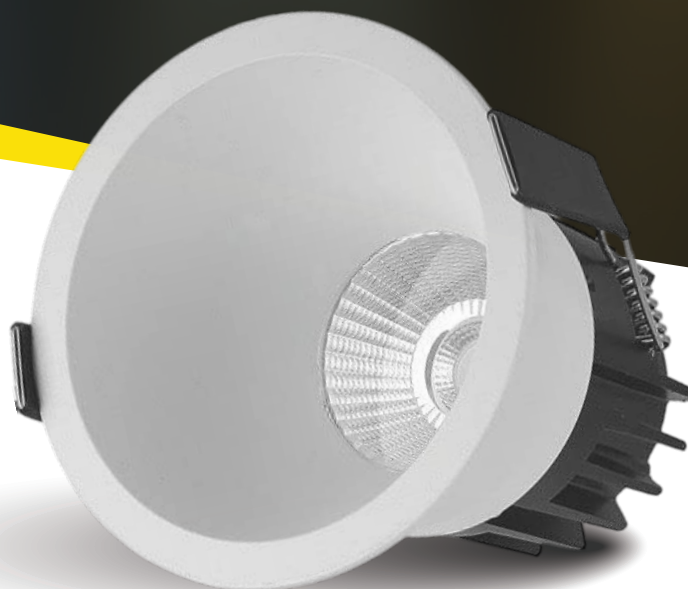

PREMIUM COB

BLACK COB

COB light with sharp focus. Lights up the spot you want, bright and clear. Light that make ceiling look modern and elegant.

- *Antiglare optics with deep reflector design.*
- *Aluminium heat sink for better heat dissipation*



SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	36°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	4000k	3000k
7w	62mm	55mm	67mm	EN0627	EN0628	EN0629
12w	71mm	70mm	85mm	EN0639	EN0640	EN0641
18w	100mm	80mm	95mm	EN0651	EN0652	EN0653

APPLICATIONS



GLAM COB

COB LIGHT

Light that gives bright, focused and glare-free effect. Perfect for accent or task lighting, built to last with a clean and modern finish.

Unique curved reflector & premium finish with aluminium housing.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	24°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	4000k	3000k
7w	50mm	60mm	70mm	EN0604	EN0605	EN0606
12w	65mm	75mm	85mm	EN0610	EN0611	EN0612
18w	90mm	85mm	95mm	EN0616	EN0617	EN0618

APPLICATIONS



GLAM COB

COB LIGHT

Light that gives bright, focused and glare-free effect. Perfect for accent or task lighting, built to last with a clean and modern finish.

Unique curved reflector & premium finish with aluminium housing.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	24°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	4000k	3000k
7w	50mm	60mm	70mm	EN0601	EN0602	EN0603
12w	65mm	75mm	85mm	EN0607	EN0608	EN0609
18w	90mm	85mm	95mm	EN0613	EN0614	EN0615

APPLICATIONS



GLAM COB

COB LIGHT

Light that gives bright, focused and glare-free effect. Perfect for accent or task lighting, built to last with a clean and modern finish.

Unique curved reflector & premium finish with aluminium housing.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	24°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	4000k	3000k
7w	50mm	60mm	70mm	EN0681	EN0682	EN0683
12w	65mm	75mm	85mm	EN0684	EN0685	EN0686
18w	90mm	85mm	95mm	EN0687	EN0688	EN0689

APPLICATIONS



HIGH BRIGHTNESS



LUMA GLOW

THIN TRIM COB LIGHT

Minimal design, maximum impact. Delivers bright, precise light while blending smoothly with your ceiling.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	36°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	4000k	3000k
7w	100mm	52mm	55mm	EN0661	EN0662	EN0663
12w	100mm	68mm	75mm	EN0667	EN0668	EN0669
18w	120mm	81mm	92mm	EN0673	EN0674	EN0675

APPLICATIONS



LUMA GLOW

THIN TRIM COB LIGHT

Minimal design, maximum impact. Delivers bright, precise light while blending smoothly with your ceiling.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	36°

COLOUR



3000K



4000K



6500K

Wattage	Height	Cut Out Size	Outer Diameter	6500k	4000k	3000k
7w	100mm	52mm	55mm	EN0664	EN0665	EN0666
12w	100mm	68mm	75mm	EN0670	EN0671	EN0672
18w	120mm	81mm	92mm	EN0676	EN0677	EN0678

APPLICATIONS



GLOWSTONE

LED ROPE LIGHT

2 Years Warranty

Flexible, durable, and bright — LED rope lights that bend to your imagination and make every space sparkle.

Watt/Mtr	IP RATING	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	LED/MTR	LENGTH
8W	IP65	100 LM/W*	220-240V~	120	45 Meter

COLOUR




Colour	Cat No.
3000k	EN0111
4000k	EN0112
6500k	EN0113
Pink	EN0114

Colour	Cat No.
Green	EN0115
Blue	EN0116
Ice Blue	EN0117
Amber	EN0118

Adopter

CAT NO.	OUTPUT VOLTAGE (V)	INPUT VOLTAGE (V)	SURGE PROTECTION
EN0108	12V	220-240V AC, 50HZ	4KV

APPLICATIONS

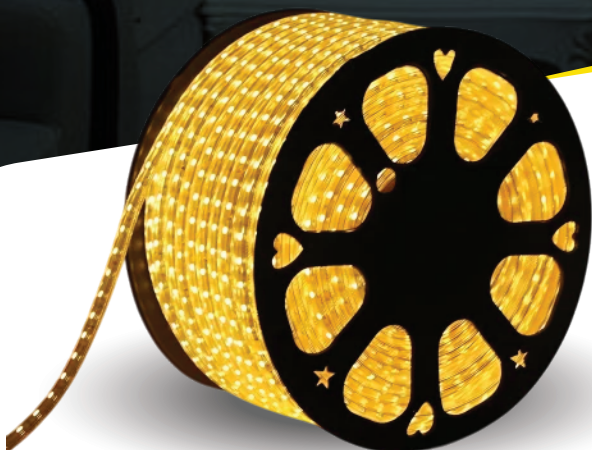

TIRANGA


LED ROPE LIGHT

2 Years Warranty

From festive decor to national pride, Tiranga rope lights bring the colours of India to life.

Watt/Mtr	CAT NO.	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	LED/MTR	LENGTH
12W	EN0119	100 LM/W*	220-240V~	120	18 Meter

APPLICATIONS



HIGH BRIGHTNESS



SPARKLINE 320

COB STRIP LIGHT

2 Years Warranty

Seamless strip lighting that adds a modern glow to walls, ceilings, and décor.

- 3M taping for better adhesive
- Double side copper layer for efficient flow of current (100% copper).

Wattage	CRI	SYSTEM LUMINOUS EFFICACY	VOLTAGE (VDC)	POWER FACTOR	LENGTH
48W	≥80	90 LM/W*	24V	>0.90	5 Meter

COLOUR



6500K



3000K



4000K



ICE BLUE

Colour	Cat No.	LED/M	PCB Width
3000k	EN0121	320	8mm
4000k	EN0122	320	8mm
6500k	EN0124	320	8mm
Ice Blue	EN0123	320	8mm

Adopter

CAT NO.	OUTPUT CURRENT (A)	OUTPUT POWER (W)	OUTPUT VOLTAGE (V)	INPUT VOLTAGE (V)	SURGE PROTECTION
EN1110	2A	48W	24V	220~240V AC, 50HZ	4KV

APPLICATIONS



HIGH BRIGHTNESS



PROFILE STRIP LIGHT

LED STRIP LIGHT

2 Years Warranty

Seamless strip lighting that adds a modern glow to walls, ceilings, and decor.

- 3M taping for better adhesive
- Double side copper layer for efficient flow of current (100% copper).

Watt/Mtr	CRI	SYSTEM LUMINOUS EFFICACY	VOLTAGE (VDC)	POWER FACTOR	LENGTH
12	≥80	100 LM/W*	12V	>0.90	5 Meter

COLOUR



6500K



3000K



4000K



GREEN



BLUE



PINK

Colour	Cat No.	LED/M	PCB Width
3000k	EN0101	240	10mm
4000k	EN0102	240	10mm
6500k	EN0103	240	10mm
Pink	EN0104	240	10mm
Green	EN0105	240	10mm
Blue	EN0106	240	10mm

APPLICATIONS



HIGH BRIGHTNESS



LIGHTING

DRIVER

LED STRIP DRIVER

2 Years Warranty

A perfect blend of sleek design and powerful brightness for homes and offices.

Pencil Adopter

CAT NO.	OUTPUT CURRENT (A)	OUTPUT POWER (W)	OUTPUT VOLTAGE (V)	INPUT VOLTAGE (V)	SURGE PROTECTION
EN1101	3A	36W	12V	220~240V AC, 50HZ	4KV
EN1102	5A	60W	12V	220~240V AC, 50HZ	4KV

Slim Adopter

CAT NO.	OUTPUT CURRENT (A)	OUTPUT POWER (W)	OUTPUT VOLTAGE (V)	INPUT VOLTAGE (V)	SURGE PROTECTION
EN1103	5A	60W	12V	220~240V AC, 50HZ	4KV
EN1104	10A	120W	12V	220~240V AC, 50HZ	4KV
EN1105	16.5A	200W	12V	220~240V AC, 50HZ	4KV
EN1106	25A	300W	12V	220~240V AC, 50HZ	4KV



STEP LIGHT

LED FOOT LIGHT

2 Years Warranty

LED Foot Light that adds ambience to staircases and walls.

- Aluminium LED Foot Light — sleek design, lasting brilliance.

SURGE PROTECTION	CRI	PRODUCT SIZE	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	≥80	3X3 Inch	220~240V AC, 50HZ	>0.9	IP 65

COLOUR



3000K



4000K



6500K

Wattage	Body color	6500k	3000k	4000k
3w	White	EN0854	EN0855	EN0856
3w	Black	EN0857	EN0858	EN0859

Sensor

Wattage	Body color	3000k
3w	Black	EN0860

APPLICATIONS



HIGH BRIGHTNESS



OUTDOOR LIGHTS

Durable Lighting with Style and Strength

Illuminate your exteriors with ENAARGY's outdoor lighting solutions, designed to deliver unmatched durability and performance. From weather-resistant wall sconces and high-lumen floodlights to energy-efficient garden fixtures and pathway lights, our collection combines robust construction with elegant designs.



TEJAS

STREET LIGHT

2 Years Warranty

Smart design with powerful brightness for safer streets and spaces.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	BEAM ANGLE
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.90	120°

COLOUR



6500K

EN1001

APPLICATIONS

50_w

IP 66



POWERBEAM


LED FLOOD LIGHT

2 Years Warranty

Bright, strong, and built to last. Covers wide areas with smooth, even light and a sleek modern look.
Aluminium housing with hybrid LED chip.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	VOLTAGE PROTECTION
4KV	≥80	100 LM/W*	220-240V AC, 50HZ	>0.90	440V

COLOUR



Wattage	6500k	3000k
30w	EN0081	EN0086
50w	EN0082	EN0087
100w	EN0083	EN0088
150w	EN0084	EN0089
200w	EN0085	EN0090

APPLICATIONS



SPIKE LIGHT

LED GARDEN LIGHT

2 Years Warranty

A perfect blend of sleek design and powerful brightness for homes and offices.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP RATING
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.9	IP 65

COLOUR



3000K

Wattage	Cat No.
5w	EN1228

APPLICATIONS



K LIGHT

LED WALL LIGHT

2 Years Warranty

Brighten outdoor walls, walkways, and courtyards with K Wall Light.

SURGE PROTECTION	CAT NO.	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	EN1216	200 LM/W*	220~240V AC, 50HZ	>0.6	IP 65



3000K

6w

APPLICATIONS



HIGH BRIGHTNESS

HALF K LIGHT

LED CONCEALED LIGHT

2 Years Warranty

Enhance patios, walkways, and balconies with Half K Light.

SURGE PROTECTION	CAT NO.	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	EN1215	200 LM/W*	220~240V AC, 50HZ	>0.6	IP 65



3000K

APPLICATIONS



3w



WAVE

LED WALL LIGHT

2 Years Warranty

Light up exteriors with the elegance of Wall Light.

2 Way

SURGE PROTECTION	CAT NO.	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	EN1211	200 LM/W*	220~240V AC, 50HZ	>0.6	IP 65



3000K

2w

4 Way

SURGE PROTECTION	CAT NO.	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	EN1213	200 LM/W*	220~240V AC, 50HZ	>0.6	IP 65



3000K

4w

APPLICATIONS



LEXUS

LED WALL LIGHT

2 Years Warranty

Add a modern glow to outdoor walls with Wall Light.

2 Way

SURGE PROTECTION	CAT NO.	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	EN1201	200 LM/W*	220~240V AC, 50HZ	>0.6	IP 65

2w



3000K

4 Way


SURGE PROTECTION	CAT NO.	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	EN1203	200 LM/W*	220~240V AC, 50HZ	>0.6	IP 65

4w



3000K

APPLICATIONS

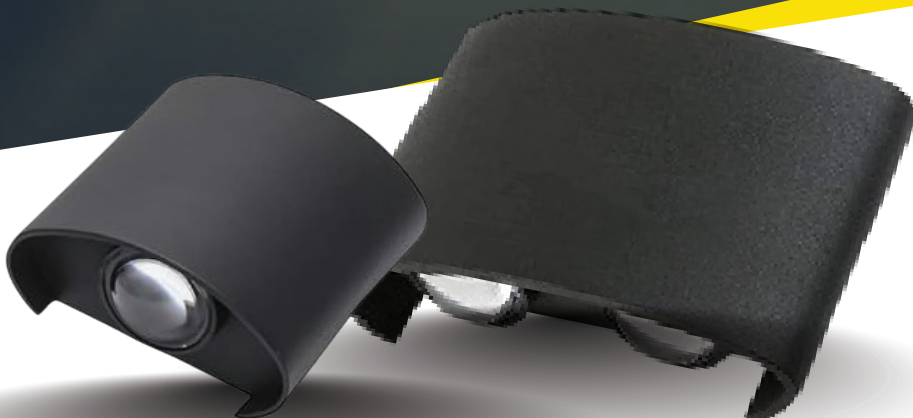

LEXUS

LED WALL LIGHT

2 Years Warranty

Transform ordinary exteriors into radiant spaces with Wall Light.

6 Way

SURGE PROTECTION	CAT NO.	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	EN1205	200 LM/W*	220~240V AC, 50HZ	>0.6	IP 65



3000K

6w

8 Way

PROTECTION	CAT NO.	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	EN1207	200 LM/W*	220~240V AC, 50HZ	>0.6	IP 65



3000K

8w

APPLICATIONS



LIGHTING

GLOW SPHERE

LED OUTDOOR LIGHT

2 Years Warranty

SURGE PROTECTION	CRI	PRODUCT SIZE	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	≥80	3X3 Inch	220~240V AC, 50HZ	>0.9	IP 65

COLOUR



3000K

Wattage	Way	Cat No.
6w	4 Way	EN1225
8w	6 Way	EN1226
10w	8 Way	EN1227

APPLICATIONS



GLOVA

LED OUTDOOR LIGHT

2 Years Warranty

Light up walls and open areas with energy-efficient brilliance.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	≥80	100 LM/W*	220-240V AC, 50HZ	>0.9	IP 65


COLOUR



3000K

Wattage	Body	3000k
12w	Round	EN1222
12w	Square	EN1223

APPLICATIONS

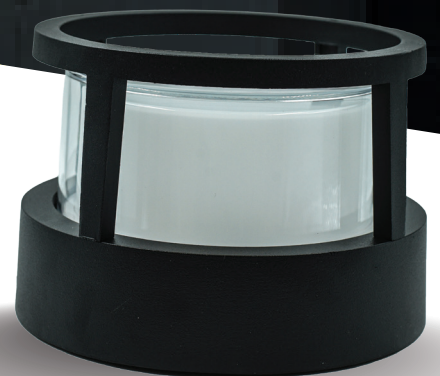

REFLEX

LED OUTDOOR LIGHT

2 Years Warranty

Light up walls and open areas with energy-efficient brilliance.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.9	IP 65


COLOUR



3000K

Wattage	Cat No.
6w	EN1221

APPLICATIONS

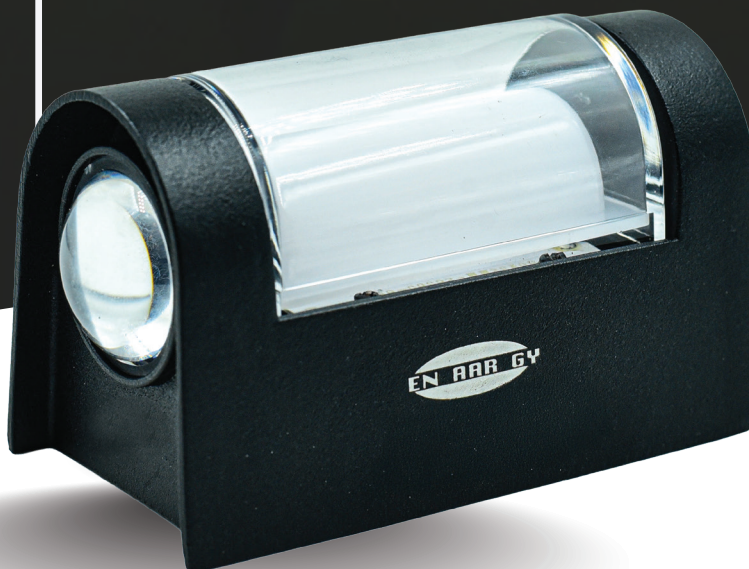

GLORA

LED OUTDOOR LIGHT

2 Years Warranty

Light up walls and open areas with energy-efficient brilliance.

SURGE PROTECTION	CRI	SYSTEM LUMINOUS EFFICACY	RATED VOLTAGE	POWER FACTOR	IP PROTECTION
4KV	≥80	100 LM/W*	220~240V AC, 50HZ	>0.9	IP 65

COLOUR



3000K

Wattage	Cat No.
12w	EN1224

APPLICATIONS



